



# SMALL-SCALE DRYING TECHNOLOGIES

Globally, drying is the most widely used method for preserving foods for use in the home or for sale. The most common method involves simply laying the product in the sun on mats, roofs or drying floors. This is known as sun drying. As shown below simple sun drying has advantages and disadvantages.

| Advantages   | Disadvantages  |
|--|--|
| <p>Almost without cost</p> <p>Ideal for products where little or no value is added</p> <p>Food usually dried close to the home</p> | <p>Open to contamination by dust</p> <p>Totally dependent on good weather</p> <p>Very slow drying rates with danger of mould growth</p> <p>It may not be possible to dry to a sufficiently low level of moisture to prevent mould growth</p> |

Sun drying remains, however, the only economic choice for poor people when drying foods such as grains in large quantities and where little or no value is added by drying.

When drying foods such as fruits, vegetables, spices, herbs and nuts value is added by drying and in such cases an investment in improved drying technologies may be economically viable. This technical brief describes improved systems suitable for use by small scale producers.

## Solar dryers

Solar dryers use a simple construction to more efficiently make use of the sun's heat. Under the correct climatic conditions they can provide many advantages over sun drying. These include:

- higher drying temperatures which results in shorter drying times and the ability to dry to a lower final moisture content.
- protection from contamination by dust and from rain showers.
- they are low cost and simple to construct in local workshops

Solar dryers consist of a transparent panel above a chamber or collector that is painted black to absorb the sun's heat. Polythene, which is very cheap, is commonly used to glaze the panel but it turns yellow and opaque after a few months and needs to be replaced. Plastic films that are not damaged by sunlight are now increasingly available and should be used if possible. While more expensive they have a life of 5 years or more. It is very important to angle the collector at the correct angle to the sun:

- the angle should be greater than 15° to allow rain water to run off
- the collector should be angled at 90° to the mid-day sun
- the collector should face south in the Northern hemisphere and north in the Southern
- the collector should be sited away from shadows from trees or buildings

**Tent solar dryers**, as shown in Figure 1, are cheap and simple to build and consist of a frame of wood poles covered with plastic sheet. Black plastic should be used on the wall facing away from the sun. The food to be dried is placed on a rack above the ground. Tent dryers provide protection against rain, insects and dust and, in the case of fish for example, can reduce drying times by 25%. Tent dryers can also be taken down and stored when not in use. They have the disadvantage of being easily damaged by strong winds

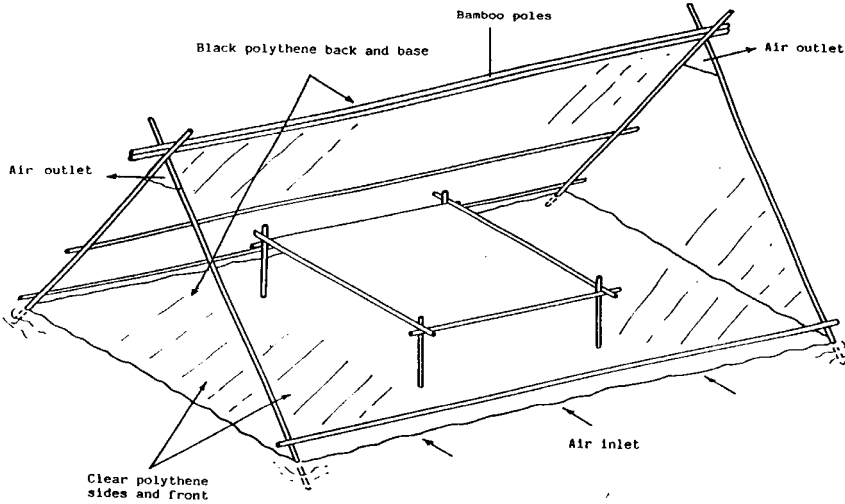


Figure 1: Typical tent solar dryer

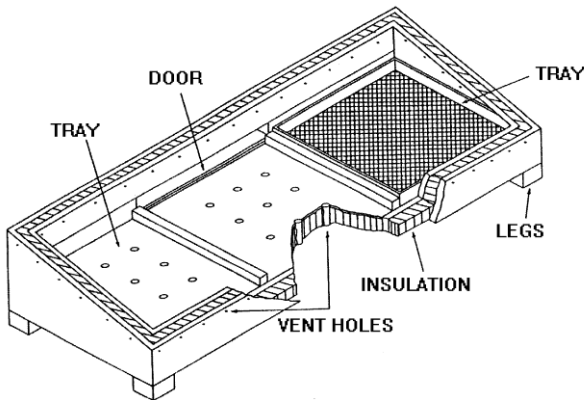


Figure 2: Typical brace type dryer

The **Brace solar dryer** as shown in Figure 2 has been widely used for small scale food drying. It consists of a wooden box with a hinged transparent lid. The inside is painted black and the food supported on a mesh tray above the dryer floor. Air flows into the chamber through holes in the front and exits from vents at the top of the back wall. Brace type dryers achieve higher temperatures, and thus shorter drying times, than tent dryers.

A further design of solar dryer uses of a separate solar collector which supplies heated air to a chamber containing trays of food. This is known as an indirect solar dryer and a typical design is shown in Fig

3. Dryers of this type have several advantages over direct dryers which include:

- the food is not exposed to the direct rays of the sun which reduces the loss of colour and vitamins.

- the collector can be large and thus heat greater quantities of air

Indirect dryers are, however, more expensive and complex to construct.

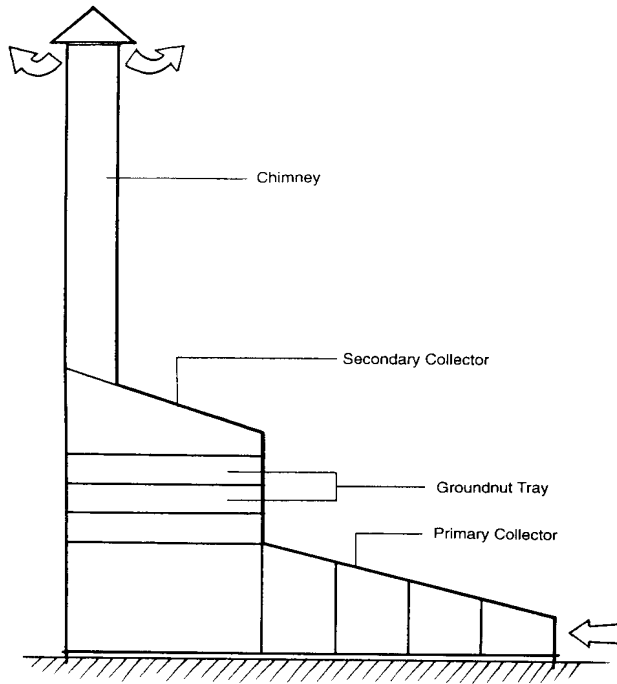


Figure 3: Indirect solar dryer

The obvious problem with solar dryers is their inability to work when there is little or no sunlight. The **McDowell dryer** shown in Fig 4 attempts to overcome this problem by combining solar heat and heat from wood burning in a fire box. The McDowell dryer consists of a block structure with a fire box at one end. Heat from the fire passes through a metal pipe below the tray of food and exits via a chimney. The whole structure supports a glazed solar roof.

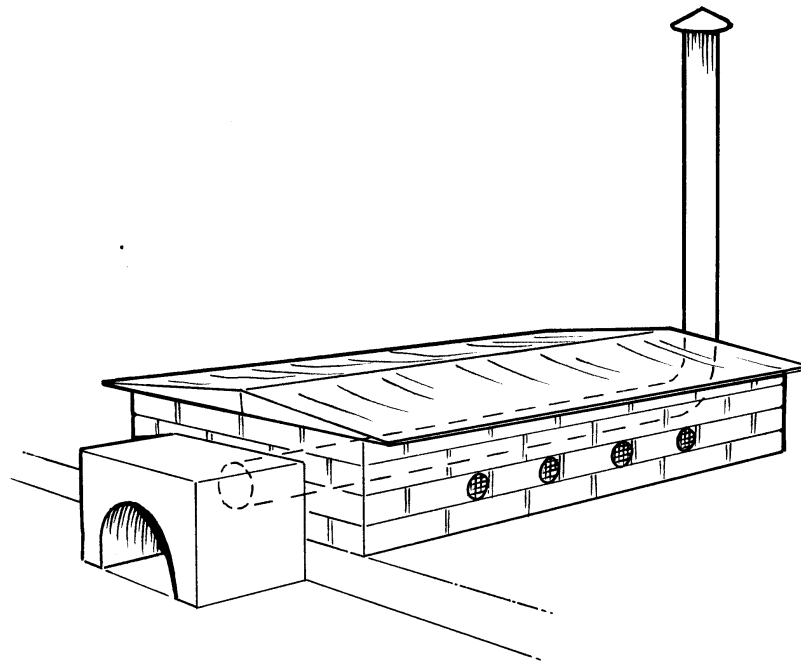


Figure 4: McDowell mixed dryer

# technical brief

**Small Electric Dryers**, as shown in Figure 5, can be constructed at a cost equal to or less than the solar dryers described above. Typically, such a dryer consists of a plywood box one metre cube, with a door to the front. Between 6 and 10 mesh trays are supported on wooden runners on the dryer walls. Heated air is supplied by a domestic 2kw fan heater to the rear base wall. The heater should be re-wired with an external thermostat (placed in the drying chamber) so that the heater elements are controlled by the thermostat while the fan runs all the time. This is a simple job that can be carried out by a competent electrician. The air exits via an opening at the top of the rear wall. The trays should be arranged so as to cause the air to follow a zig-zag path as it passes through the dryer as shown in Figure 5.

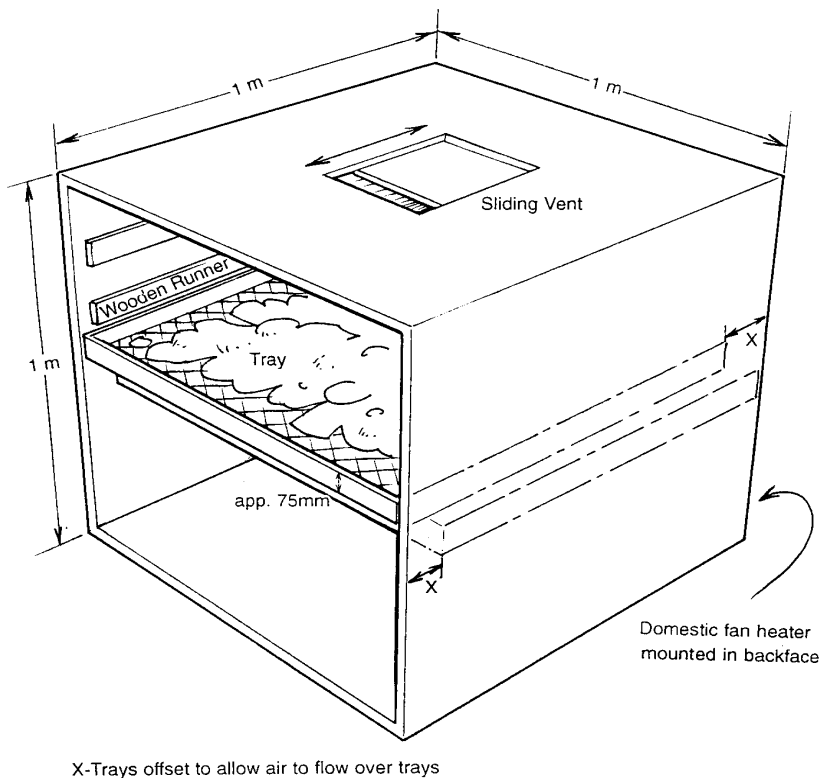


Figure 5: Small electric dryer. The air should follow a zigzag path.

Provided sufficient value is added by drying to cover electricity costs, such dryers offer distinct advantages over solar dryers which include:

- greater daily output
- higher drying temperatures and thus considerably more rapid drying
- faster drying due to the forced air flow
- total independence from weather conditions
- good control of the drying process.

## References and further reading

- [Drying](#) selection of Practical Action Technical Briefs:
- [Drying, Food Cycle Source Book 6](#) UNIFEM and Practical Action Publishing 1995
- [Preservation of Fruit and Vegetables](#): Agrodok 3, [Agromisa](#) 1997
- [Try Drying It! Case Studies in the Dissemination of Tray Drying Technology](#), B Axtell, Practical Action Publishing 1991
- [Producing Solar Dried Fruit and Vegetables for Micro and Small scale Rural Enterprise Development, A Series of Practical Guides](#)' written by the [Natural Resources Institute](#).
- [Setting up a food drying business](#) P Thuillier, Practical Action Publishing, 2002
- [Drying Food for Profit](#) B Axtell, Practical Action Publishing, 2002
- [Drying Foodstuffs: Techniques, Processes, Equipment](#), Jean-François Rozis, Backhuys Publishers, 1997
- [Construction and Use of a Simple Solar Drier to Preserve Food for Off Season](#) HEDON Household Energy Network

Practical Action  
The Schumacher Centre  
Bourton-on-Dunsmore  
Rugby, Warwickshire, CV23 9QZ  
United Kingdom  
Tel: +44 (0)1926 634400  
Fax: +44 (0)1926 634401  
E-mail: [inforserv@practicalaction.org.uk](mailto:inforserv@practicalaction.org.uk)  
Website: <http://practicalaction.org/practicalanswers/>

Practical Action is a development charity with a difference. We know the simplest ideas can have the most profound, life-changing effect on poor people across the world. For over 40 years, we have been working closely with some of the world's poorest people - using simple technology to fight poverty and transform their lives for the better. We currently work in 15 countries in Africa, South Asia and Latin America.

# technical brief